


Automotive Cable

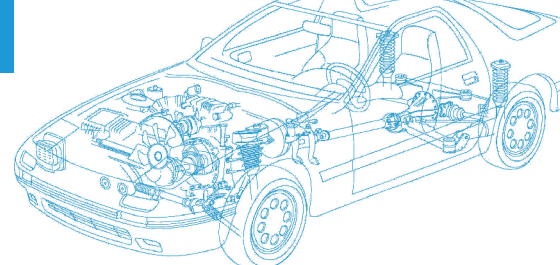


AVSSXFT

Application:

This Cross-linked Polyvinyl Chloride insulated cable is used in low voltage signal circuits in automobiles. Superior heat resistant with irradiated PVC.

Construction:

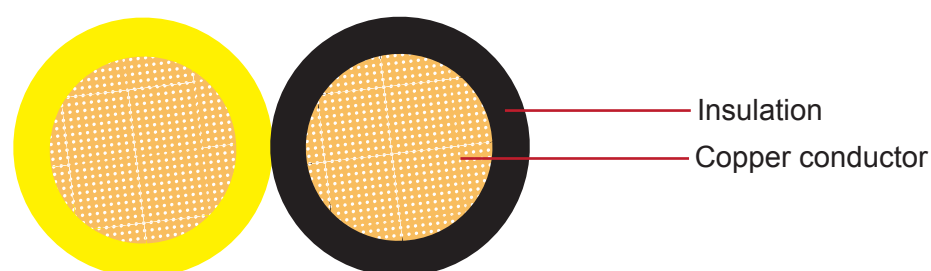

Conductor: Annealed stranded copper

Insulation: Cross-linked Polyvinyl Chloride

Standard Compliance: JASO D611; ES SPEC

Technical Parameters:

Operating temperature: -40 °C to +100 °C

Nominal Cross-section	Conductor			Insulation	Cable		
	No. and Dia. of Wires	Diameter max.	Electrical Resistance at 20 °C max.	Thickness Wall nom.	Overall Diameter min.	Overall Diameter max.	Weight Approx.
mm ²	no./mm	mm	mΩ/m	mm	mm	mm	kg/km
0.3	19/0.16	0.8	49.4	0.3	2.8	3.0	10.3
0.5	19/0.19	1.0	35.0	0.3	3.2	3.4	14.0
0.85	37/0.17	1.2	22.0	0.3	3.6	3.8	20.4
1.25	37/0.21	1.5	14.6	0.3	4.2	4.4	29.5

*Note: Other configurations, sizes, colors and length not specified herein are available upon request.