



CVVS


Application and Description:

For used in control circuits required electrostatic shielding in underground duct, conduit and open air.

Reference Standard:

IEC 60502-1

Cable Construction:

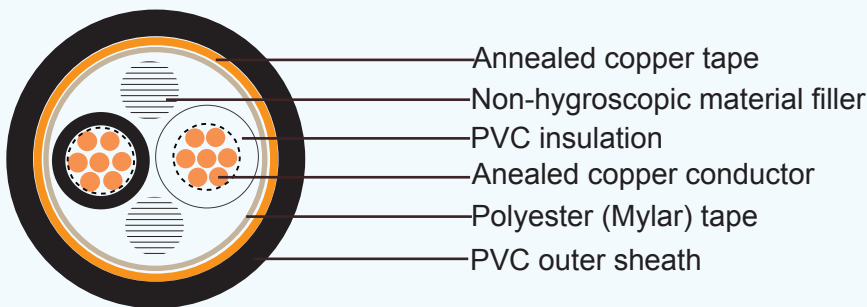

Conductor: Stranded annealed copper wires, Sizes: 1.5 mm² up to 10 mm²

Insulation: Polyvinyl chloride (PVC)

Color : 2-4 cores-Black, White, Red and Green ,More than 4 cores: Black core with marking numbers

Filler: Non-hygroscopic material(optional)

Binding tape: Polyester (Mylar) tape (optional)

Shield: Annealed copper tape, 0.1mm

Outer sheath: Polyvinyl chloride (PVC), Black color (A special flame retardant can be supplied)

Technical Characteristics:

Maximum conductor temperature 70°C

Circuit voltage not exceeding 600 volts

Test voltage 3500 volts

Caledonian Cables Manufacture

Cable Parameter:

NO. of Cores	Conductor			Thickness of insulation	Thickness of outer Sheath	Overall diameter	Maximum conductor resistance (at 20°C)	Cable weight
	Nominal cross-sectional area	No. & dia. of wires	Diameter					
	mm ²	mm	mm					
2	1.5	7 / 0.53	1.59	0.8	1.8	11.4	12.1	178
	2.5	7 / 0.67	2.01	0.8	1.8	12.3	7.41	213
	4	7 / 0.85	2.55	1.0	1.8	14.2	4.61	287
	6	7 / 1.04	3.12	1.0	1.8	15.4	3.08	350
	10	7 / 1.35	4.05	1.0	1.8	16.9	1.83	413
3	1.5	7 / 0.53	1.59	0.8	1.8	11.9	12.1	209
	2.5	7 / 0.67	2.01	0.8	1.8	12.9	7.41	254
	4	7 / 0.85	2.55	1.0	1.8	15.0	4.61	351
	6	7 / 1.04	3.12	1.0	1.8	16.2	3.08	435
	10	7 / 1.35	4.05	1.0	1.8	17.9	1.83	537
4	1.5	7 / 0.53	1.59	0.8	1.8	12.8	12.1	247
	2.5	7 / 0.67	2.01	0.8	1.8	13.9	7.41	305
	4	7 / 0.85	2.55	1.0	1.8	16.2	4.61	425
	6	7 / 1.04	3.12	1.0	1.8	17.6	3.08	533
	10	7 / 1.35	4.05	1.0	1.8	19.5	1.83	675
5	1.5	7 / 0.53	1.59	0.8	1.8	13.8	12.1	287
	2.5	7 / 0.67	2.01	0.8	1.8	15.0	7.41	357
	4	7 / 0.85	2.55	1.0	1.8	17.3	4.61	500
	6	7 / 1.04	3.12	1.0	1.8	19.2	3.08	636
	10	7 / 1.35	4.05	1.0	1.8	21.4	1.83	820
6	1.5	7 / 0.53	1.59	0.8	1.8	14.8	12.1	328
	2.5	7 / 0.67	2.01	0.8	1.8	16.1	7.41	412
	4	7 / 0.85	2.55	1.0	1.8	19.0	4.61	586
	6	7 / 1.04	3.12	1.0	1.8	20.8	3.08	744
	10	7 / 1.35	4.05	1.0	1.8	23.2	1.83	968





Addison Cables to IEC/TIS Standard

www.addison-tech.com

www.addison-cables.com

NO. of Cores	Conductor			Thickness of insulation	Thickness of outer Sheath	Overall diameter	Maximum conductor resistance (at 20°C)	Cable weight
	Nominal cross-sectional area	No. & dia. of wires	Diameter					
	mm ²	mm	mm					
7	1.5	7 / 0.53	1.59	0.8	1.8	14.8	12.1	349
	2.5	7 / 0.67	2.01	0.8	1.8	16.1	7.41	442
	4	7 / 0.85	2.55	1.0	1.8	19.0	4.61	633
	6	7 / 1.04	3.12	1.0	1.8	20.8	3.08	810
	10	7 / 1.35	4.05	1.0	1.8	23.2	1.83	1,072
8	1.5	7 / 0.53	1.59	0.8	1.8	15.8	12.1	392
	2.5	7 / 0.67	2.01	0.8	1.8	17.3	7.41	498
	4	7 / 0.85	2.55	1.0	1.8	20.5	4.61	718
	6	7 / 1.04	3.12	1.0	1.8	21.7	3.08	919
	10	7 / 1.35	4.05	1.0	1.8	24.5	1.83	1,224
10	1.5	7 / 0.53	1.59	0.8	1.8	18.2	12.1	488
	2.5	7 / 0.67	2.01	0.8	1.8	19.9	7.41	622
	4	7 / 0.85	2.55	1.0	1.8	23.8	4.61	902
	6	7 / 1.04	3.12	1.0	1.8	22.4	3.08	1,159
	10	7 / 1.35	4.05	1.0	1.8	29.6	1.83	1,552
12	1.5	7 / 0.53	1.59	0.8	1.8	18.7	12.1	542
	2.5	7 / 0.67	2.01	0.8	1.8	20.5	7.41	697
	4	7 / 0.85	2.55	1.0	1.8	24.6	4.61	1,018
	6	7 / 1.04	3.12	1.0	1.8	27.0	3.08	1,316
	10	7 / 1.35	4.05	1.0	1.8	30.5	1.83	1,789
15	1.5	7 / 0.53	1.59	0.8	1.8	20.0	12.1	637
	2.5	7 / 0.67	2.01	0.8	1.8	22.1	7.41	827
	4	7 / 0.85	2.55	1.0	1.8	26.4	4.61	1,216
	6	7 / 1.04	3.12	1.0	1.8	29.1	3.08	1,582
20	1.5	7 / 0.53	1.59	0.8	1.8	22.1	12.1	796
	2.5	7 / 0.67	2.01	0.8	1.8	24.5	7.41	1,041
	4	7 / 0.85	2.55	1.0	1.8	29.5	4.61	1,547
	6	7 / 1.04	3.12	1.0	1.8	32.5	3.08	2,026
30	1.5	7 / 0.53	1.59	0.8	1.8	26.3	12.1	1,122
	2.5	7 / 0.67	2.01	0.8	1.8	28.2	7.41	1,482
	4	7 / 0.85	2.55	1.0	1.9	35.6	4.61	2,244