



Coaxial Cables

www.caledonian-cables.co.uk

Mud Resistant Composite Cable

Applications


These composite cables consist of cat6 data cable & coaxial cable & power cable, with copper wire braid armoured & flame retardant oil&mud resistant outer sheath.



Standards

- IEC 60092-359
- IEC 60332-3-22
- IEC 60754-1,2
- IEC 61034-1,2
- NEK 606:2004

Construction

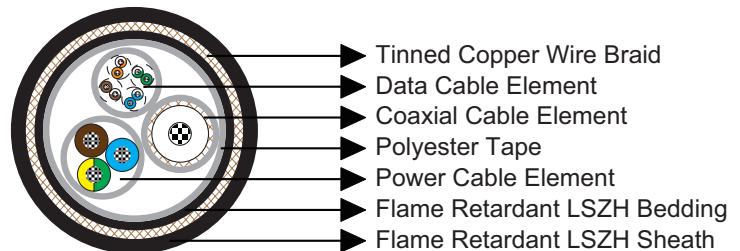

1) 4×2×0.57mm U/UTP Cat6 Data Cable:

- **Conductors:** Solid bare copper wire.
- **Insulation:** PE.
- **Twinning:** Two coloured insulated wire twisted to form a pair.
- **Sheath:** Flame retardant LSZH, coloured grey.

2) RG59 Coaxial Cable:

- **Conductors:** 0.58mm solid bare copper wire.
- **Insulation:** PE.
- **Shielding:** Bare copper wire braid.
- **Sheath:** Flame retardant LSZH, coloured grey.

3) 3×1.0mm² Power Cable:

- **Conductors:** 7/0.44mm stranded bare copper wire.
- **Insulation:** XLPE. Coloured Blue, Brown, Green/Yellow.
- **Sheath:** Flame retardant LSZH, coloured grey

4) Element Assembly

- **Filler:** PP, PVC, PE or LSZH Material.
- **Wrapping:** Polyester Tape.





Coaxial Cables

- **Bedding:** Flame retardant LSZH.
- **Armour:** Tinned copper wire braid.
- **Outer Sheath:** Oil & mud resistant, flame retardant LSZH, coloured grey.

Dimensions

Cable Construction	Nominal Data Cable Diameter mm	Nominal Coaxial Cable Diameter mm	Nominal Power Cable Diameter mm	Nominal Overall Diameter mm
4×2×0.57mm + RG59 + 3×1.0mm ²	6.0	6.2	6.8	21.0

Note: Other construction can be offered upon request.

