


FIREROL Thin Wall Multicore Overall Screened Cables with Standard Wall Sheath 300/500 V EN 50306-4 (FRL-TW-05M-SW-OS)

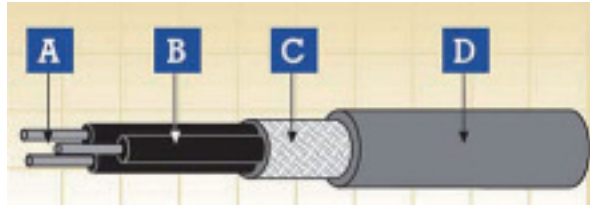

A. Conductor B. Insulation C. Screen D. Sheath

Application

-Used as signal and control cable for protected installations inside and outside of rail and transport vehicles, where space and weight are an important factor.

-Used in cable harnesses, switchboards and control panels, driver desks etc.

Construction

Conductor

Tinned annealed copper wires as defined in EN 50306-2

Insulation

LSZH special compound

Overall Screen

Tinned annealed copper wires

Outer Sheath

LSZH special compound as defined in EN 50264-1 (S2. EM 101 - EM 104)

Electrical & Mechanical Properties

Nominal Voltage	300/500 V
Max. Conductor Temperature	90 °C/105 °C (fixed installation)
Min. Permissible Ambient Temperature	-25 °C/-40 °C (fixed installation)
Bending Radius	10 x Overall Diameter

Chemical & Environmental Properties

EN 60684-2	No fluorine
EN 50305; EN 60811-2-1	Resistance to mineral oil & fuel oil, acid & alkali
EN 50305	Resistance to ozone

Fire Performance for Rolling Stock Application

EN 50306-2	Hazard levels HL1, HL2/HL3, HL4
DIN 5510-2	Protection level 1/2/3/4
BS 6853	Interior use 1a, 1b, II; Exterior use 1a, 1b, II
NF F 16-101	F0

Fire Performance in General

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)	Vertical flame propagation for a single insulated wire or cable
EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804	Vertical flame spread of vertically mounted bunched wires or cables
EN 50268-2; IEC 61034-2; NF C 32-073 ; NF C 20-902; NF F 16 101; VDE 0472 Teil 816	Low Smoke Emission
EN 50267-2-1; IEC 60754-1; NF C 32-074; NF C 20-454; VDE 0472 Teil 815	Halogen Free
EN 50267-2-2/3; IEC 60754-2; NF C 32-074; NF C 20-453; VDE 0472 Teil 813	Low Corrosivity (Acidity & Conductivity)
EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853 NF F 63 808; BS6853; NF F 16 101	Low Toxicity Smoke Index

EN 50306 Rolling Stock Cables

FRL-TW-05M-SW-OS 300/500 V

Number of Cores and Nominal Cross Section	Min. Thickness of Sheath at any Point	Overall Diameter		Weight
		Min.	Max.	
n x mm ²	mm	mm	mm	kg/km
2 x 0.5	0.42	4.1	5.1	30
3 x 0.5	0.42	4.3	5.3	40
4 x 0.5	0.42	4.7	5.7	50
6 x 0.5	0.42	5.5	6.5	70
8 x 0.5	0.42	6.0	7.0	90
2 x 0.75	0.42	4.5	5.5	40
3 x 0.75	0.42	4.7	5.7	50
4 x 0.75	0.42	5.2	6.2	60
6 x 0.75	0.42	6.1	7.1	90
8 x 0.75	0.42	6.6	7.6	110
2 x 1.0	0.42	4.7	5.7	50
3 x 1.0	0.42	5.1	6.0	60
4 x 1.0	0.42	5.5	6.5	80
6 x 1.0	0.42	6.6	7.6	110
8 x 1.0	0.56	7.7	8.7	140
2 x 1.5	0.42	5.7	6.7	70
3 x 1.5	0.42	6.0	7.0	90
4 x 1.5	0.42	6.6	7.6	100
6 x 1.5	0.56	8.3	9.3	160
8 x 1.5	0.56	8.9	10.1	200
2 x 2.5	0.56	7.3	8.3	100
3 x 2.5	0.56	7.7	8.7	130
4 x 2.5	0.56	8.4	9.6	160


EN 50306 Rolling Stock Cables




Corona Resistant



Highly Flexible




UV Resistant




Ozone Resistant



Abrasion Retardant



Cold Resistant



Resistance To Soldering Heat



Acid & Alkaline Resistant



IRM 903
Fuel Oil Resistant



IRM 902
Mineral Oil Resistant



Fire Retardant
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1




Low Toxicity
EN 50305; NF X70-100/NF
F63 808/TM1-04/BS 6853



Low Corrosivity
IEC60754-2/EN50267-2-2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454