


FIREROL Thin Wall Single Core Unsheathed Cables

250 V

NF F 63-808 (FRF-TW-025SU)

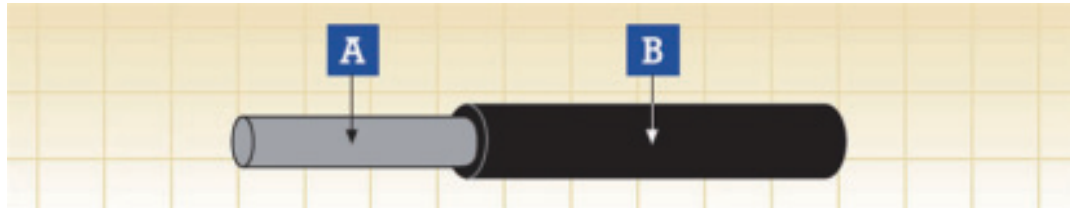

A. Conductor B. Insulation

Application

These cables are used as signal and control cable for protected installations inside and outside of rail and transport vehicles, where space and weight are an important factor, suitable for use in cable harnesses, switchboards and control panels, driver desks etc

Construction

Conductor

Stranded tinned copper wires

Insulation

Radiation crosslinkable LSZH compound

Electrical & Mechanical Properties

Nominal Voltage	250 V
Max. Conductor Temperature	105 °C/125 °C
Temperature Range	-40 °C~+105 °C
Bending Radius	5 × Overall Diameter

Standards

NF F 63-808
 NF F 16-101
 BS 6853
 DIN 5510

Fire Performance in General

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)
 EN 50266-2-4 + EN 50305; IEC 60332-3-24;
 NF C 32-070 2.2 (C1); VDE 0472 Teil 804
 EN 50268-2; IEC 61034-2; NF C 32-073 ;
 NF C 20-902; NF F 16 101; VDE 0472 Teil 816
 EN 50267-2-1; IEC 60754-1; NF C 32-074;
 NF C 20-454; VDE 0472 Teil 815
 EN 50267-2-2/3; IEC 60754-2; NF C 32-074;
 NF C 20-453; VDE 0472 Teil 813
 EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853
 NF F 63 808; BS6853; NF F 16 101

Vertical flame propagation for a single insulated wire or cable
 Vertical flame spread of vertically mounted bunched wires or cables

Low Smoke Emission

Halogen Free

Low Corrosivity (Acidity & Conductivity)

Low Toxicity
 Smoke Index

















NF F 63-808 Rolling Stock Cables

FRF-TW-025SU 250 V

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Overall Diameter		Weight
		Min.	Max.	
mm ²	No/mm	mm	mm	kg/km
0.38	19/0.16	1.15	1.35	4.7
0.60	19/0.20	1.30	1.55	6.5
0.93	19/0.25	1.55	1.80	9.9
1.34	19/0.30	1.80	2.00	14.0
1.82	37/0.25	2.10	2.40	18.4
2.61	37/0.30	2.50	2.80	27.8
4.32	61/0.30	3.00	3.30	44.2



NF F 63-808 Rolling Stock Cables

 Impact Resistant	 Highly Flexible	 UV Resistant	 Ozone Resistant	 Abrasion Retardant	 Cold Resistant	 Resistance To Soldering Heat	 Acid & Alkaline Resistant
 IRM 903 Fuel Oil Resistant	 IRM 902 Mineral Oil Resistant	 Fire Retardant NF C32-070-2.2(C1) IEC60332-3-24/EN50266-2-4	 Flame Retardant NF C32-070-2.1(C2) IEC60332-1-2/EN50265-2-1	 Low Toxicity EN 50305; NF X70-100/NF F63 808/TM1-04/BS 6853	 Low Corrosivity IEC60754-2/EN50267-2-2/3 NF C32-074/NF C20-453	 Low Smoke Emission IEC 61034-2 / EN 50268-2 NF C32-073/NF C 20-902	 Zero IEC 60754-1/EN 50267-2-1 NF C20-454