



H05G-K / H07G-K

Application and Description

These cables are recommended for the internal wiring of switchboards and distributor boards as well as in operating parts in or on lights. The higher temperature range allows for connections to heaters with an alternating nominal voltage of 1000V. or direct nominal voltage of 750V. These cables are all allowed for laying in tubes in and under plaster.

Standard and Approval

NF C 32-102-7, CE Low Voltage Directive 73/23/EEC and 93/68/EEC, ROHS compliant

Cable Construction


- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber compound type EI3 (EVA) to DIN VDE 0282 part 7 insulation
- Cores to VDE-0293 colors

Technical Characteristics

- Working voltage: 300/500v (H05G-K), 450/750v (H07G-K)
- Test voltage: 2000volts (H05G-K), 2500 volts (H07G-K)
- Flexing bending radius: 7 x Ø
- Static bending radius: 7 x Ø
- Flexing temperature: -25° C to +110° C
- Static temperature: -40° C to +110° C
- Short circuit Temperature: +160° C
- Flame retardant: NF C 32-070
- Insulation resistance: 10 MΩ x km




French Standard



Bare copper conductor

Rubber compound insulation

H05G-K

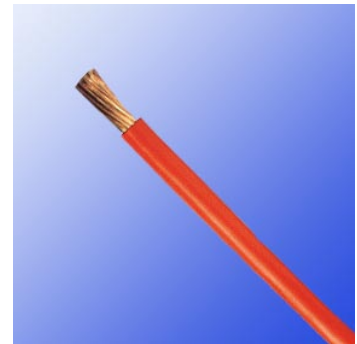

H05G-K

Cable Parameter

| AWG | No. of Cores x Nominal Cross Sectional Area # x mm ² | Nominal Thickness of Insulation mm | Nominal Overall Diameter mm | Nominal Copper Weight kg/km | Nominal Weight kg/km |
|-------------|--|---|--------------------------------------|-----------------------------------|----------------------------|
| H05G-K | | | | | |
| 20(16/32) | 1 x 0.5 | 0.6 | 2.3 | 4.8 | 13 |
| 18(24/32) | 1 x 0.75 | 0.6 | 2.6 | 7.2 | 16 |
| 17(32/32) | 1 x 1 | 0.6 | 2.8 | 9.6 | 22 |
| H07G-K | | | | | |
| 16(30/30) | 1 x 1.5 | 0.8 | 3.4 | 14.4 | 24 |
| 14(50/30) | 1 x 2.5 | 0.9 | 4.1 | 24 | 42 |
| 12(56/28) | 1 x 4 | 1.0 | 5.1 | 38 | 61 |
| 10(84/28) | 1 x 6 | 1.0 | 5.5 | 58 | 78 |
| 8(80/26) | 1 x 10 | 1.2 | 6.8 | 96 | 130 |
| 6(128/26) | 1 x 16 | 1.2 | 8.4 | 154 | 212 |
| 4(200/26) | 1 x 25 | 1.4 | 9.9 | 240 | 323 |
| 2(280/26) | 1 x 35 | 1.4 | 11.4 | 336 | 422 |
| 1(400/26) | 1 x 50 | 1.6 | 13.2 | 480 | 527 |
| 2/0(356/24) | 1 x 70 | 1.6 | 15.4 | 672 | 726 |
| 3/0(485/24) | 1 x 95 | 1.8 | 17.2 | 912 | 937 |
| 4/0(614/24) | 1 x 120 | 1.8 | 19.7 | 1152 | 1192 |